

RFID PAPER

Coated Line

C 530

NXP® NTAG 216




- Ready to print
- Best performance on HP Indigo 7xxx
- 100% workable RFID antennas on each sheet
- HP Indigo certified SG7600-19-211



HP INDIGO Print operator quick guide:


- Unpack the box;
- Remove the upper & lower protective sheets;
- Put the RFID paper in HP Indigo 7xxx, use positional corner to align;
- Send the artwork to print single or double sides one-shot or multi-shot printing option;
- Laminate by PET/BOPP or varnish overlay as option;
- Punch cards on card punching machine or by card guillotine cutter and slitter machine.

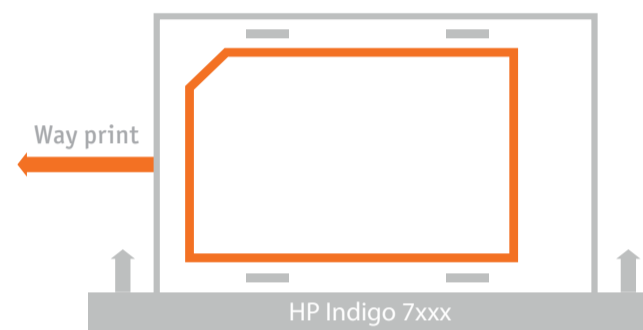

Product Features:

Part number	C 530
Sheet size (mm)	325 x 480 ± 1mm
Grammage (GSM)	440 ± 3 %
Thickness (µm)	380 ± 3 %
Substrate	Coated
Inlay type	PET + Al
Layout type	M72-N04
Chip type	NXP® NTAG 216
HP certified	Yes
Certified by RFID Paper Sdn.Bhd.	Yes

Product Drawing base dimensions:

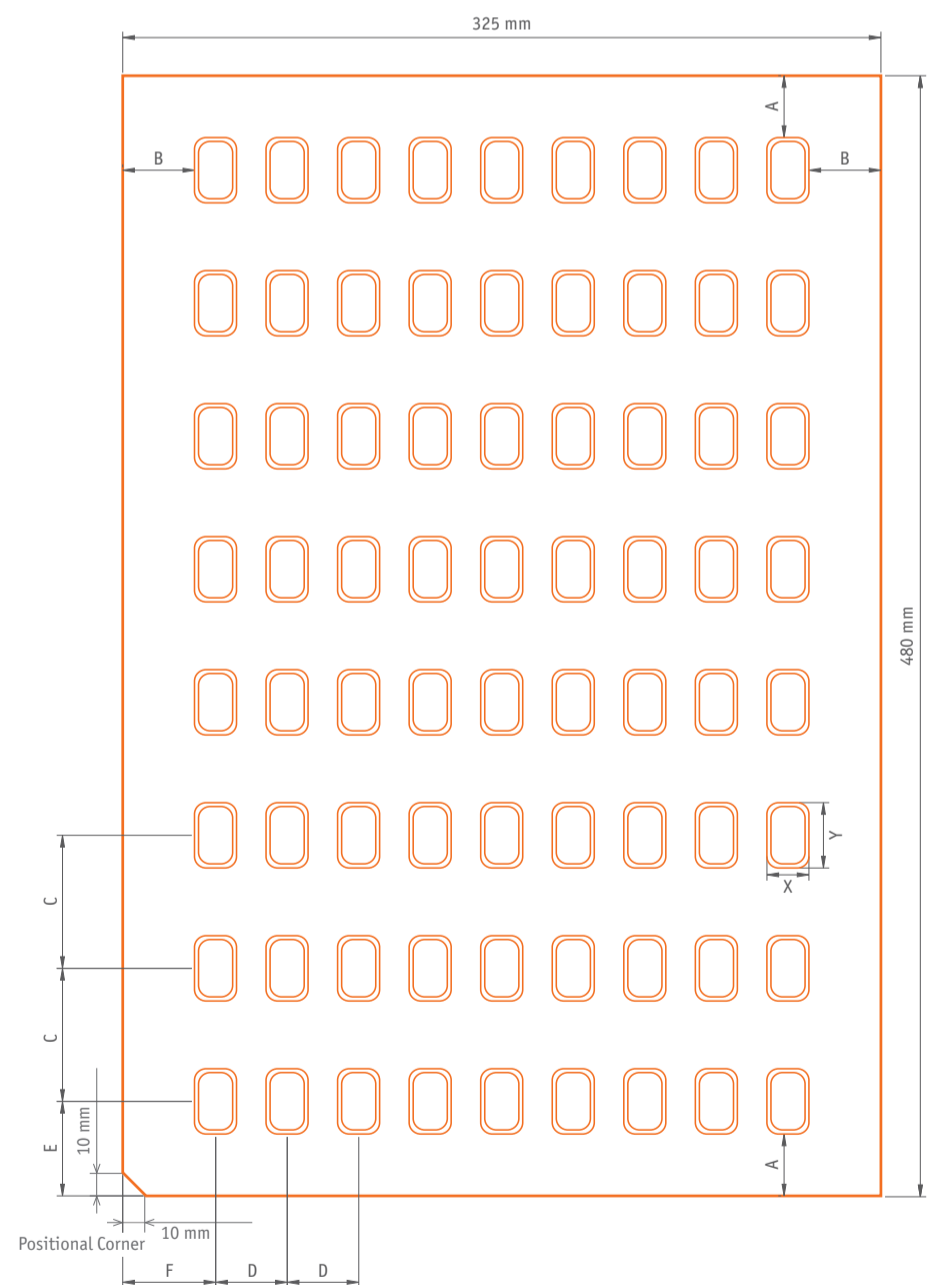

X = 18 mm	A = 26.5 mm	C = 57 mm	E = 40.5 mm
Y = 28 mm	B = 30.86 mm	D = 30.66 mm	F = 39.86 mm

Protected from unauthorised access by RF SHIELD.