

RFID PAPER

Coated Line

C 705


NXP® NTAG 216

- Ready to print
- Best performance on HP Indigo 7xxx
- 100% workable RFID antennas on each sheet



HP INDIGO Print operator quick guide:


- Unpack the box;
- Remove the upper & lower protective sheets;
- Put the RFID paper in HP Indigo 7xxx, use positional corner to align;
- Send the artwork to print single or double sides one-shot or multi-shot printing option;
- Laminate by PET/BOPP or varnish overlay as option;
- Punch cards on card punching machine or by card guillotine cutter and slitter machine.

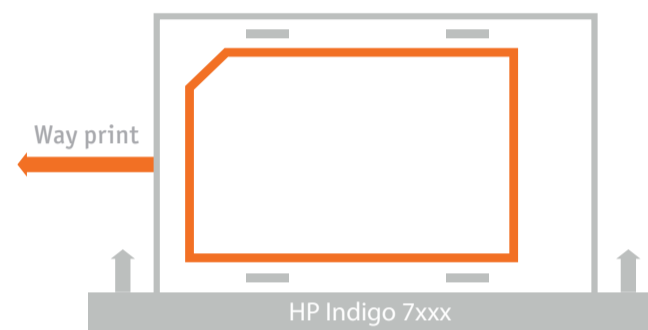

Product Features:

Part number	C 705
Sheet size (mm)	325 x 480 ± 1mm
Grammage (GSM)	430 ± 3 %
Thickness (µm)	420 ± 3 %
Substrate	SAPPI
Inlay type	PET + AL
Layout type	M08-N01
Chip type	NXP® NTAG 216
Certified by RFID Paper Sdn.Bhd.	Yes

Product Drawing base dimensions:

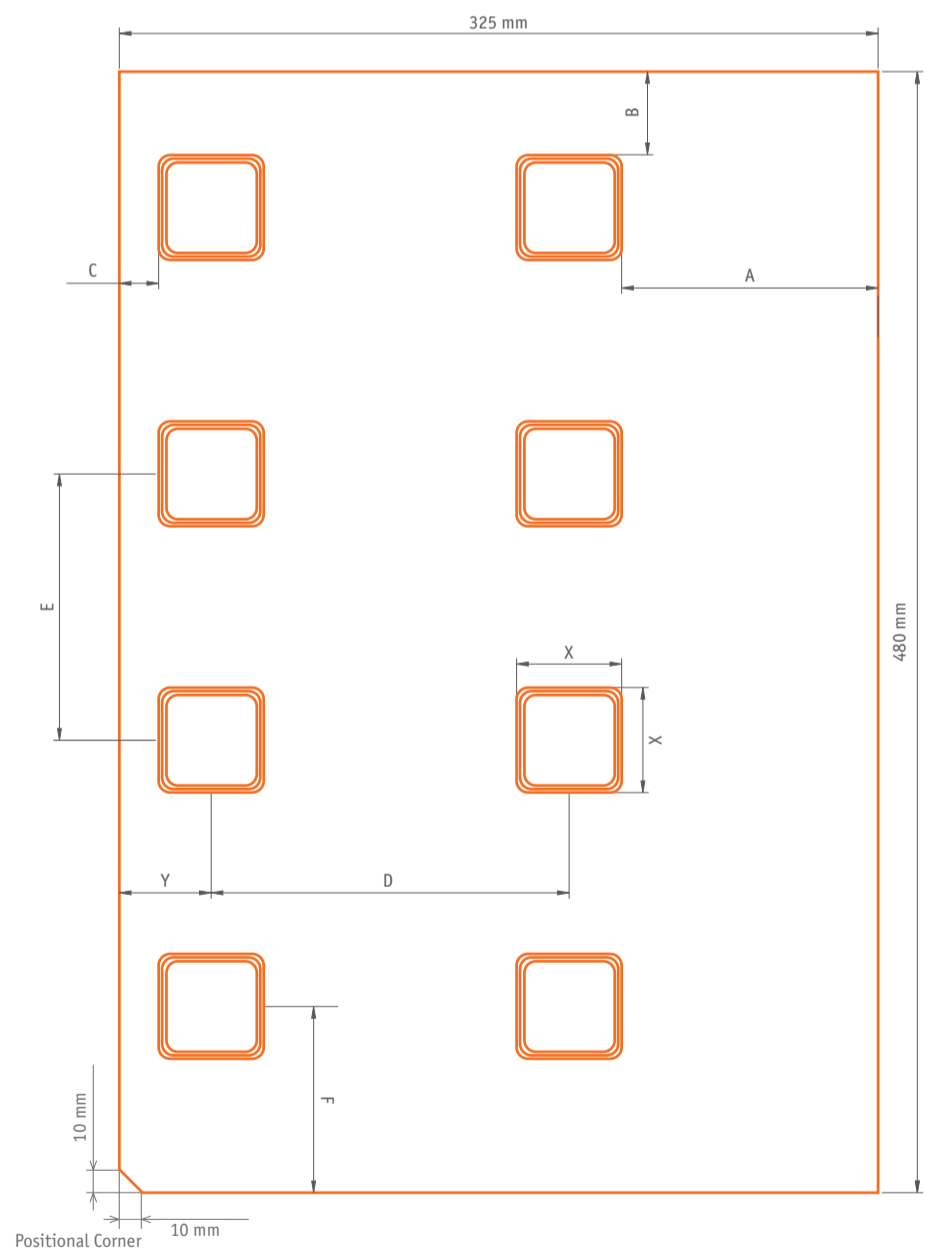

X = 45 mm	A = 109.84 mm	C = 16.86 mm	E = 114 mm
Y = 39.36 mm	B = 35.58 mm	D = 153.3 mm	F = 79.92 mm

Protected from unauthorised access by RF SHIELD.