

# RFID PAPER

## YUPO Line

### S 280


### NXP® NTAG 216

- Ready to print
- Best performance on HP Indigo 7xxx
- 100% workable RFID antennas on each sheet



### HP INDIGO Print operator quick guide:


- Unpack the box;
- Remove the upper & lower protective sheets;
- Put the RFID paper in HP Indigo 7xxx, use positional corner to align;
- Send the artwork to print single or double sides one-shot or multi-shot printing option;
- Laminate by PET/BOPP or varnish overlay as option;
- Punch cards on card punching machine or by card guillotine cutter and slitter machine.

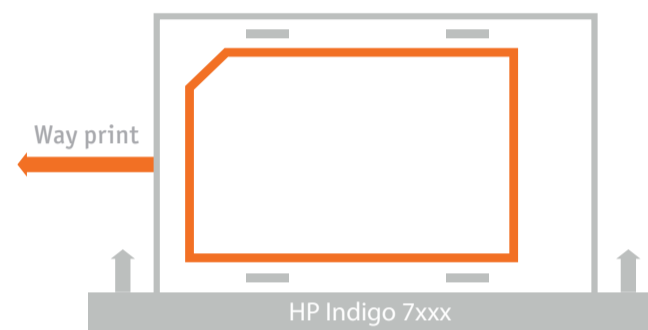

### Product Features:

|                                  |                 |
|----------------------------------|-----------------|
| Part number                      | S 280           |
| Sheet size (mm)                  | 325 x 480 ± 1mm |
| Grammage (GSM)                   | 360 ± 3 %       |
| Thickness (µm)                   | 425 ± 8 %       |
| Substrate                        | YUPO            |
| Inlay type                       | PET + Al        |
| Layout type                      | M24-N03         |
| Chip type                        | NXP® NTAG 216   |
| Certified by RFID Paper Sdn.Bhd. | Yes             |

### Product Drawing base dimensions:

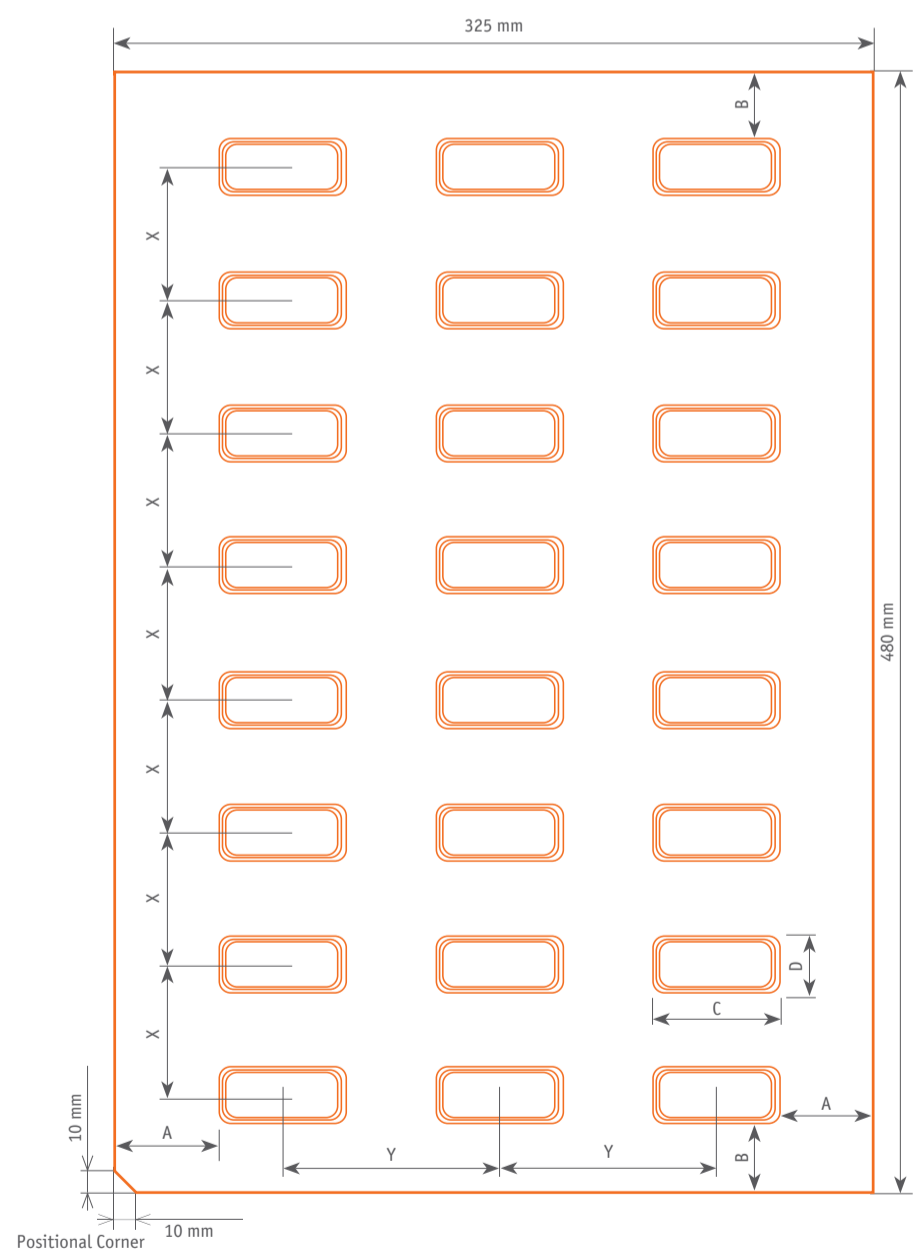

X = 57 mm      A = 42.9 mm      C = 55.1 mm  
 Y = 92 mm      B = 27.9 mm      D = 25 mm

Protected from unauthorised access by RF SHIELD.